


# S-2430C

## Bi-color SMD Studio Panel LED light

# SWIT

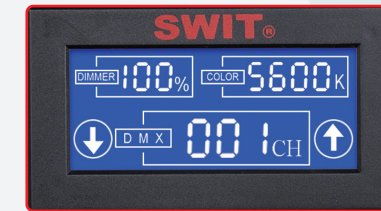

### LCD screen display

The rear LCD screen can display the current dimmer percentage, color temperature value, and supports touch control to set DMX address.

### ■ Features:

- ◆ 1152pcs ultra bright long-life LEDs
- ◆ Surface mounted LED technology
- ◆ 70° wide beam angle with diffuser
- ◆ 3200K-5600K continuously adjustable
- ◆ 100W power, 2500Lux @ 1meter
- ◆ 10%-100% flick-free dimming
- ◆ Super high CRI Ra≥93, TLCI≥97
- ◆ DMX512 controlled color and dimmer
- ◆ LCD display color and dimmer value
- ◆ Power by V-mount battery or AC-DC adaptor
- ◆ 4-leaf metal barn doors
- ◆ Strong all-metal housing
- ◆ U-shape support and lighting tripod mount

### ■ Specifications:

LED	1152pcs SMD LEDs
Illuminance	2500Lux @ 1m
Beam angle	70°
Color Temperature	5600K±300K ~ 3200K±200K
CRI	≥93
TLCI	≥97
Power	100W
Working voltage	DC12V — 17V
Dimension	630 x 440 x 83mm
Lighting area	477 x 237mm
Weight	5.8kg