

# SWIT®

## 4 Batteries 48V/24V Power Station Box

### S-4040


- ▶ 3-pin 48V/10A out
- ▶ 4-pin 24V/10A out
- ▶ PP+ Fiber glass case
- ▶ Charging inside (5A)



#### Output Description

Battery	Outlet	Voltage	Max Load
4x V-mount batteries (size ≤ 170x105x70mm)	3-pin XLR	48V Regulated	10A
	4-pin XLR	24V Regulated	10A

- \* 48V output requests 4 batteries together, and 24V output requests any 1-4 batteries.
- \* Use same model batteries and same capacity percentage are recommended.

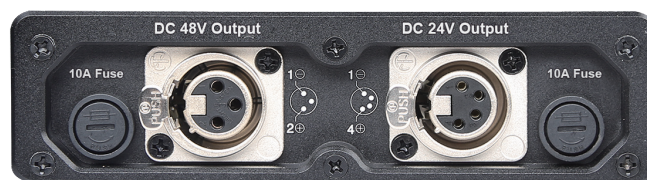

#### Battery Run Time

Capacity \ Devices	Skypanel S60/S120 48V	Orbiter 48V	Alexa SXT 24V	Alexa LF 24V	Alexa Mini LF 24V
4x 160Wh batteries	>1.5 hours	>1.5 hours	>6.8 hours	>3.6 hours	>9 hours
4x 220Wh batteries	>2 hours	>2 hours	>9 hours	>5 hours	>12 hours
4x 240Wh batteries	>2.2 hours	>2.2 hours	>10 hours	>5.5 hours	>13 hours
4x 260Wh batteries	>2.4 hours	>2.4 hours	>11 hours	>6 hours	>14.5 hours
4x 290Wh batteries	>2.6 hours	>2.6 hours	>12 hours	>6.5 hours	>16 hours

The S-4040 Power Station Box doesn't include batteries, please purchase batteries separately.


**SWIT Electronics Co., Ltd.**  
+86-25-85805753  
<http://www.swit.cc>  
Email: [contact@swit.cc](mailto:contact@swit.cc)

**SWIT Electronics America, Inc**  
1-(408)260-8258  
<http://www.swit.us>  
Email: [info@swit.us](mailto:info@swit.us)

**SWIT Electronics Europe GmbH**  
+49(0)20659799339  
<http://www.swit-europe.com>  
Email: [info@swit-europe.com](mailto:info@swit-europe.com)



Facebook Page



Instagram